

HDN-4 DUO

4-Port Dual-Head HDMI KVM Switch with USB 2.0 and Audio



**UNINTERRUPTED
USB, KEYBOARD & MOUSE
EMULATION**

Access and control four computers using
one USB keyboard-mouse and two HDMI Monitors.
Supports full USB 2.0 KVM Emulation, 4K HD, and stereo audio.

FEATURES

- Switch KVM control on four connected computers from one workstation with two HDMI monitors.
- Dual-Head HDMI support
- Supports resolutions up to 3840x2160 (@30Hz)
- HDCP compliant
- Zero pixel loss with TMDS signal correction
- Supports all USB 2.0 devices, including keyboard and mouse
- Supports Windows, Mac and Linux
- Rack mountable in a standard 19 inch rack
- Supports control via RS-232
- Hot key commands for quick channel selection
- Independent (asynchronous) switching of KVM and peripheral USB ports. Users can scan a document and save in another computer
- Complete keyboard emulation for error free booting
- Front panel keys for manual switching
- DP and DVI supported with adaptors, backwards compatible with prior HDMI versions



4K/2K

**HD
ready
1080p**

Smart-AM
SMART AUDIO VIDEO INNOVATION

OVERVIEW

HDN-4 DUO is a dedicated multi-platform KVM switch capable of managing four 4K computers with a USB keyboard-mouse combo and two HDMI monitors. The HDN-4 DUO's dual-head HDMI connectors deliver top quality 4K Ultra-HD (3840x2160 @30Hz) for highly detailed visual operations. Both DisplayPort and DVI video connections are also supported via adapters (sold separately), and the device is backwards compatible with prior HDMI versions.

The USB emulation technology utilized by HDN-4 DUO enables immediate hot key source switching through the connected USB keyboard and mouse. Additional USB peripherals can be attached, like a USB printer. RS-232 control and front panel switching are supported.

SOURCE SWITCHING MADE EASY

The HDN-4 DUO provides a simplified management approach for four HDMI equipped computers USB 2.0 outputs for a keyboard, mouse and other USB peripheral devices. This dynamic KVM console can be controlled via keyboard hot-keys or RS-232 commands, as well as directly through the console's easy-to-read front panel.

EDID PASS-THROUGH

The HDN-4 DUO features EDID Pass-Through technology, which enables smooth and efficient switching, making the device easy to implement in virtually any scenario. This plug-and-play EDID functionality makes set up hassle free and simple.

FULL USB KEYBOARD AND MOUSE EMULATION


The HDN-4 DUO simulates the presence of a keyboard and mouse for every attached computer through a USB cable. The USB keyboard and mouse emulation utilized by HDN-4 DUO allows for quick source switching and prevents signal interruption from other devices.

REAL-WORLD APPLICATIONS

The HDN-4 DUO has a broad range of applications, but the main function is to centralize the access of up to four computers that support HDMI displays in a single workstation. Not only does it function as a KVM console, but it also supports USB 2.0 functionality. This allows users to access nearby USB device, including those not supported by other KVM switches. The HDN-4 DUO is the ideal solution for medical, industrial, studio and defense applications, where it is not practical or safe to have multiple CPUs in the vicinity of the workstation.

- Server Collocation
- Digital Signage
- Education
- Airports
- Dealer Rooms
- Banking/Finance
- Hospitals/Medical Care
- Control Rooms
- Audio/Visual Presentations
- Shopping Centers
- Hotels/Resorts

Smart-AM HDN-4 DUO

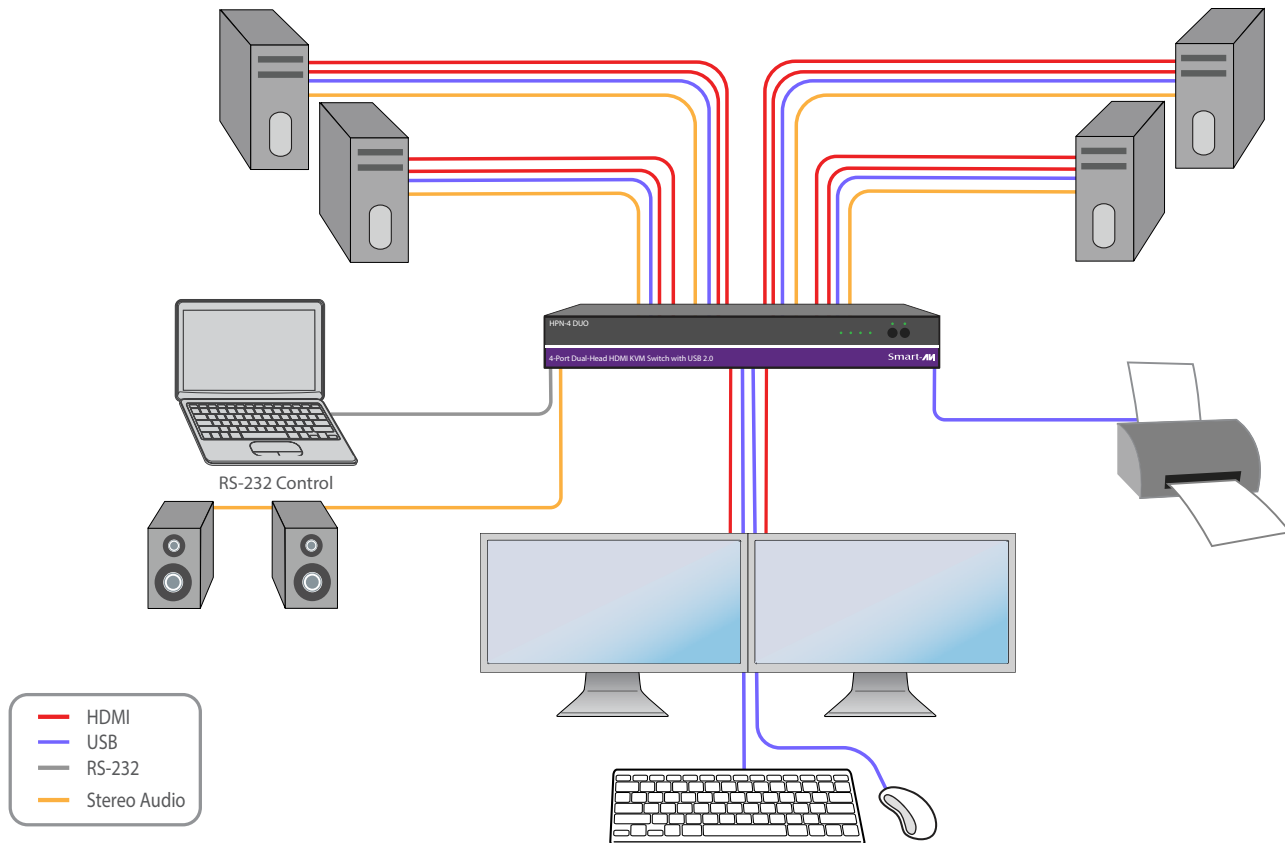

FLEXIBLE CONTROL

RS-232: Any external device or program supporting RS-232 can control the HDN-4 DUO. The HDN-4 DUO uses a very simple protocol that enables easy integration with other devices.

USB/KEYBOARD: Hot keys enable the user to switch and control all the different functions of the KVM switch.

FLEXIBLE SHARING

INDEPENDENT SIMULTANEOUS DEVICE SELECTION: Flexibility is key with the HDN-4 DUO. It enables the use of a USB keyboard and mouse of one computer while other USB peripherals such as scanners and printers are connected to other computer sources. HDN-4 DUO maintains the ability to switch all connected devices to any one of the computer sources as with any other KVM switches.

SPECIFICATIONS



HDN-4 DUO Front



HDN-4 DUO Rear

| VIDEO | |
|--------------------|--|
| Format | HDMI 1.4 |
| Input Interface | (8) HDMI 19-pin (female) |
| Output Interface | (2) HDMI 19-pin (female) |
| Resolution | Up to 4K (3840x2160 @ 30Hz) |
| DDC | 5 volts p-p (TTL) |
| Input Equalization | Automatic |
| Data Rate | 1.65 Gbps |
| Max. Cable Lengths | 20 ft |
| USB | |
| Signal Type | USB 2.0, 1.1, and 1.0 w/ internal hub |
| Input Interface | (4) USB Type B (female) |
| Output Interface | (2) USB 1.1 Type A (female) for keyboard and mouse |
| | (2) USB 2.0 Type A Transparent |

| AUDIO | |
|--------------------|-------------------------------|
| Input | (4) 3.5mm stereo audio jack |
| Output | (1) 3.5mm stereo audio jack |
| Frequency Response | 20Hz ~ 20KHz |
| Nominal Level | 0 to 1.0 V |
| Common Mode | Rejection @ 60 dB |
| OTHER | |
| Power | External 100-240 VAC/ 5VDC4A |
| Dimensions | 3.0" H x 5.75" D x 12.75" W |
| Weight | 3.95 lbs |
| Approvals | UL, CE, ROHS Compliant |
| Operating Temp. | 23 to 95°F (-5 to 35°C) |
| Storage Temp. | -4 to 185 °F (-20 to 85 °C) |
| Humidity | up to 95%RH (No Condensation) |

| CONTROL | |
|-------------|------------------------------------|
| Front Panel | <M1 & M2> Source Selection Buttons |
| RS-232 | Via Control @ 9600 bps |
| Hot Keys | Via Keyboard |
| Emulation | Keyboard and mouse only |

| ORDERING INFORMATION | |
|----------------------|---|
| Part No. | Description |
| HDN-4 DUOS | 4-Port Dual-Head HDMI KVM Switch with 4K HD and audio. Includes: [HDN-4 DUO & (PS5VDC4A)] |



Designed and Manufactured in the USA

www.smartavi.com

Tel: 800.AVI.2131 • 818.503.6200 • 11651

Vanowen St. North Hollywood, CA. 91605

Smart-AVI
SMART AUDIO VIDEO INNOVATION