




### Benefits

- ▶ 2U 17" 4K LCD console drawer
- ▶ Dual slide - LCD and keyboard slide independently
- ▶ 3840 x 2160 native resolution / 16.7M colors ( 8-bit )
- ▶ 1920 x 1080 & 1920 x 1200 resolution support
- ▶ Display port 1.2 video input / USB KB / MS
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ Built-in dual stereo speakers
- ▶ Short depth design of 480mm
- ▶ One Man installation design
- ▶ Enhanced aesthetics with molded front handle and two point lock
- ▶ 2-year standard warranty ( upgradable up to 5 years )

### Options

- HDMI 2.0 video input
- 3G / HD / SD-SDI Broadcast-grade input
- DC power : 12V / 24V / 48V / 125V
- MAC or SUN Micro keyboard options available
- Touchscreen : Projected Capacitive 10-pt / Resistive 1-pt

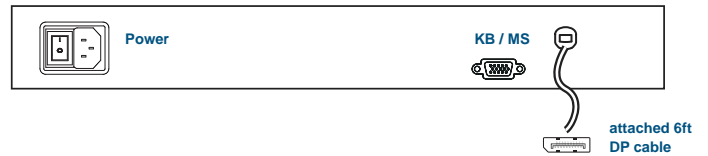

### Product Specifications

Console Port	
Video input attached 6ft DP cable	Display port 1.2
KB / MS bundled 6ft cable : EKC-2	Drawer end : DB-15 ( USB KB / MS ) Server end : USB type A

LCD Panel	
Panel size ( diagonal )	17.3"
Native resolution	3840 x 2160
Brightness ( cd/m <sup>2</sup> )	300
Contrast ratio ( typ )	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle ( L/R/U/D )	89/89/89/89
Response time ( ms )	16
Dot pitch ( mm )	0.0995
Display area ( mm )	382.12H x 214.94V
Surface treatment	Anti-glare
Surface hardness	3H
Backlight type	LED
MTBF ( hrs )	20,000

Video Option		
Digital	HDMI	HDMI 2.0 / HDCP 2.2

Audio Option		
Output	Connector	3.5mm stereo jack
	Resistance / Power level	30kΩ / 2.8V
Speaker	Dual stereo	2W x 2

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 29W / Max. 38W
	Power saving mode	Max. 9W / Max. 18W
	Power button off	Max. 2W / Nil


Physical			
Product ( W x D x H )	Single console	442 x 480 x 88 mm 17.4 x 18.9 x 3.5 inch	
	Console w/ KVM	442 x 480 x 88 mm 17.4 x 18.9 x 3.5 inch	
Packing ( W x D x H )	Single console / Console w/ KVM	585 x 620 x 190 mm 23 x 24.4 x 7.5 inch	
	Net weight	Single console 20.4 kg / 44.9 lb	Console w/ KVM 21.1 kg / 46.4 lb
Gross weight	Single console	24.8 kg / 54.6 lb	Console w/ KVM 27 kg / 59.4 lb


Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	20~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration ( 11ms duration )
Vibration	10~300Hz 0.5G RMS random vibration

Mounting Distance	
Single console drawer / Console w/ KVM drawer	490 ~ 700 mm 19.3 ~ 27.6 inch

Compliance	
EMC	FCC & CE certified
Safety	CE / LVD certified
Environment	RoHS2 & REACH compliant



# RKP2417K models w/ KVM

<b>DP KVM</b>		<b>Remote</b>	<b>12-port</b>
	0	0	RKP2417K - 1201P


DP USB KVM Cable	
Resolution	16:10 - max. 1920 x 1200
Support :	16:9 - max. 3840 x 2160 4:3 - max. 1600 x 1200
<b>** Resolution related to LCD specification</b>	
 CP - 6 ( 6 ft )	

## Standard Keyboard



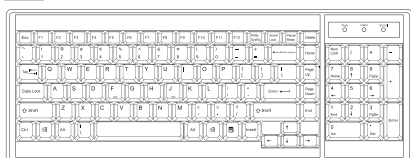



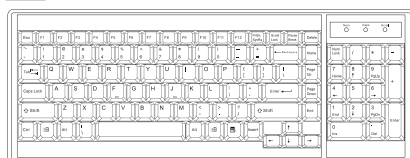









**Ge** G keyboard integrated with touchpad



**Gb** G keyboard integrated with trackball



### Supporting layouts

<b>America</b>		United States			
<b>EMEA</b>					
	United Kingdom	Germany	France	Spain	Norway
					
	Italy	Russia	Switzerland	Netherlands	Portugal
<b>Asia</b>					
	China	Japan	Korea	Arabia	Turkey

## Keyboard Options

\* US layout only

**Me** Mac keyboard with touchpad



**Mb** Mac keyboard with trackball

**Se** S keyboard with touchpad

**Sb** S keyboard with trackball

