



RD119 - 19" Dual-Slide Rack Drawer

Features & Benefits

- 19 in. LCD - 1280 x 1024 Max. Resolution
- 1U rack console drawer w/ dual slide rails: retractable keyboard & independent LCD display
- Simple to install, configure, and operate for easy, at-the-rack access of all your rack-based servers.
- Supports Windows, Linux, Mac, and other operating Systems
- USB and PS2 interface with included 6 foot console cable (PS/2 support by request).
- UL, cUL, CE, FCC, & CCC Certified
- PC, SUN or MAC keyboard layout, and audio support.
- Industry-leading 2 year warranty, extendable up to 5 years.

Modular Options

- Integrated KVM switch capability - 8 to 32 Port; 1 to 4 Users (local / extender / over-IP)
- Mouse: Touchpad or Trackball
- Keyboard available in 13 languages
- DC power options: 12V / 24V / 48V / 110V / 125V
- Audio Options: 2.5mm / Speaker / Composite (BNC)
- Video Options: VGA / DVI / HDMI (HDCP) / SDI / S-Video

19" Modular Rack Console Drawer or Rack Monitor



The Raloy RD119 dual slide rack console features a 19" LCD and full 104 key keyboard with touchpad, each slides on **independent rails to allow the monitor to stay up while the keyboard is stored**. The RD119 offers a space saving, streamlined approach to your rack environment by integrating your monitor, keyboard, mouse and optional KVM in a single unit.

Access your servers with a streamlined, highly customizable Raloy rack console drawer. Integrate a modular KVM switch to control multiple servers from a single unit. Consolidate server access for virtually any environment, in 1U.



FC

CE



REACH



Integrated KVM Switch Options

Cat6 KVM	Local	Extended	IP	8-Port	16-Port	32-Port
	1	0	0	RD119 - CATx10008	RD119 - CATx10016	RD119 - CATx10032
	1	0	0	RD119 - CATx11008	RD119 - CATx11016	RD119 - CATx11032
	1	0	1	RD119 - CATx10108	RD119 - CATx10116	RD119 - CATx10132
	1	1	1	-	RD119 - CATx31116	RD119 - CATx31132
	1	1	2	-	RD119 - CATx41216	RD119 - CATx41232
	1	1	0	-	RD119 - CATx21016	RD119 - CATx21032
	1	2	0	-	RD119 - CATx32016	RD119 - CATx32032
	1	3	0	-	RD119 - CATx43016	RD119 - CATx43032

Cat6 KVM Dongles: RDG-100SD (DVI-USB) / RDG-100H (HDMI-USB) / RDG-100P (DP-USB) / RDG-100S (VGA-USB) / RDG-100 (VGA-PS2)


VGA KVM	Local	Extended	IP	8-Port	16-Port	32-Port
	1	0	0	RD119 - KVM10008	RD119 - KVM10016	-
	1	1	0	RD119 - KVM11008	RD119 - KVM11016	-
	1	0	1	RD119 - KVM10108	RD119 - KVM10116	-
	1	1	1	RD119 - KVM31108	RD119 - KVM31116	-
	1	1	2	RD119 - KVM41208	RD119 - KVM41216	-
	1	1	0	RD119 - KVM21008	RD119 - KVM21016	-
	1	2	0	RD119 - KVM32008	RD119 - KVM32016	-
	1	3	0	RD119 - KVM43008	RD119 - KVM43016	-

VGA Hub KVM	Local	Extended	IP	8-Port	16-Port	32-Port
	1	0	0	RD119 - HKVM10008	RD119 - HKVM10016	-
	1	1	0	RD119 - HKVM11008	RD119 - HKVM11016	-
	1	0	1	RD119 - HKVM10108	RD119 - HKVM10116	-

DB-15 VGA KVM Cables: RCB-6 (6 ft.) / RCB-10 (10 ft.) / RCB-15 (15 ft.)

DVI KVM	Local	Extended	IP	12-Port	-
	1	0	0	RD119 - DVIKVM112	-

DVI-D KVM Cables: RCI-6 (6ft.) / RCI-15 (15 ft.)

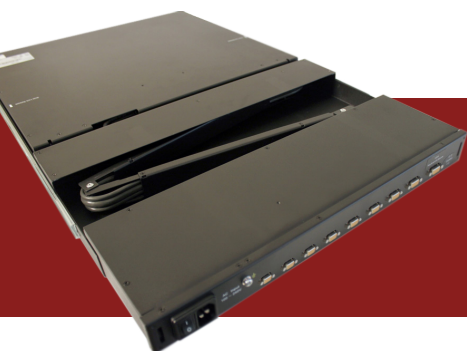

Dependable, integrated KVM switches for quick, efficient at-the-rack access of your critical servers.

Model	RD119	RD119 with Integrated KVM
Product Dimensions (HxWxD)	1.73 x 17.4 x 25.6 in (44 x 442 x 650 mm)	1.73 x 17.4 x 25.6 in (44 x 442 x 650 mm)
Package Dimensions (HxWxD)	5.5 x 23.4 x 33.9 in (140 x 595 x 860 mm)	5.5 x 23.4 x 33.9 in (140 x 595 x 860 mm)
Net Weight	29 lb (13.5 kg)	31.2 lb (14.2 kg)
Mounting Depth	26 in. (min) to 34.3 in. (max) (660 to 870 mm)	26 in. (min) to 34.3 in. (max) (660 to 870 mm)
KVM Cable (included)	1 x 6 ft Combo Cable (VGA, USB)	8-Port: 8 x KVM Cable; 16 & 32-Port: 16x KVM Cable
LCD Panel / Video & Audio		
Display Size	19" TFT	
Max Resolution (dots x lines)	1280 x 1024	
Backlight Type	LED	
Brightness (nits)	250	
Contrast Ratio (typ.)	1000:1	
Color	16.7 M	
Viewing Angle (H/V)	170° x 160°	
Active area (mm)	376 x 301	
Standard Video Input	VGA	
Optional Video Input	HDMI, DVI, Composite (BNC), S-Video	HDMI, DVI, DisplayPort, VGA
Audio	Optional Built-in Dual Stereo Speakers 2W x 2	
Power		
Supply Range	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Keyboard		
Keyboard / Mouse	104-key Notepad Keyboard / Glidepoint Touchpad	
Keyboard Layout	Windows (standard), MAC , SUN	
Keyboard Languages	United States (standard), United Kingdom, Germany, France, Spain, Norway, Italy, Russia, Switzerland, Netherlands, Portugal, China, Japan, Korea, Arabia, Turkey	
Environmental Specifications		
MTBF (hrs)	30,000	
Operation Temperature	32 to 131°F (-0 to 55°C)	
Storage Temperature	-4 to 140°F (-20 to 60°C)	
Operating Humidity	5~90%, non-condensing	