

RWX119 - 19" Widescreen Console Drawer



Features & Benefits

- 19" widescreen High-Contrast LCD - 1440 x 900 Max. Res.
- 2nd Generation, cutting-edge, modern design fits into only 1U of rack space - optional 2-post mounting available.
- Simple to install, configure, and operate for easy, at-the-rack access of all your rack-based servers.
- Sharp image rendering and video performance allow for high-quality user experiences.
- Supports Windows, Linux, Mac, and other operating Systems
- USB and PS2 interface with included 6 foot console cable (PS/2 support by request).
- UL, cUL, CE, FCC, & CCC Certified
- PC, SUN or MAC keyboard layout, and audio support.
- Industry-leading 2 year warranty, extendable up to 5 years.

Modular Options

- Integrated KVM switch capability - 8 to 32 Port; 1 to 4 Users (local / extender / over-IP)
- Mouse: Touchpad or Trackball
- Keyboard available in 13 languages
- DC power options: 12V / 24V / 48V / 110V / 125V
- Audio Options: 2.5mm / Speaker / Composite (BNC)
- Video Options: VGA / DVI / HDMI (HDCP) / SDI / S-Video

19" Modular Monitor Keyboard Drawer



The second generation Raloy RWX119 state-of-the-art modular rack console offers a space saving, streamlined approach to your rack environment by integrating your monitor, keyboard, mouse and optional KVM in a single 1U rack unit. Raloy RWX119 rack console features a 19" Widescreen LCD, full 104 key keyboard and touchpad or trackball mouse. Access your servers with a streamlined, highly customizable Raloy rack console drawer. Integrate a modular KVM switch to control multiple servers from a single unit.



FC

CE



REACH



Integrated KVM Switch Options

Cat6 KVM	Local	Extended	IP	8-Port	16-Port	32-Port
	1	0	0	RWX119 - CATx10008	RWX119 - CATx10016	RWX119 - CATx10032
	1	0	0	RWX119 - CATx11008	RWX119 - CATx11016	RWX119 - CATx11032
	1	0	1	RWX119 - CATx10108	RWX119 - CATx10116	RWX119 - CATx10132
	1	1	1	-	RWX119 - CATx31116	RWX119 - CATx31132
	1	1	2	-	RWX119 - CATx41216	RWX119 - CATx41232
	1	1	0	-	RWX119 - CATx21016	RWX119 - CATx21032
	1	2	0	-	RWX119 - CATx32016	RWX119 - CATx32032
	1	3	0	-	RWX119 - CATx43016	RWX119 - CATx43032

Cat6 KVM Dongles: RDG-100SD (DVI-USB) / RDG-100H (HDMI-USB) / RDG-100P (DP-USB) / RDG-100S (VGA-USB) / RDG-100 (VGA-PS2)


VGA KVM	Local	Extended	IP	8-Port	16-Port	32-Port
	1	0	0	RWX119 - KVM10008	RWX119 - KVM10016	-
	1	1	0	RWX119 - KVM11008	RWX119 - KVM11016	-
	1	0	1	RWX119 - KVM10108	RWX119 - KVM10116	-
	1	1	1	RWX119 - KVM31108	RWX119 - KVM31116	-
	1	1	2	RWX119 - KVM41208	RWX119 - KVM41216	-
	1	1	0	RWX119 - KVM21008	RWX119 - KVM21016	-
	1	2	0	RWX119 - KVM32008	RWX119 - KVM32016	-
	1	3	0	RWX119 - KVM43008	RWX119 - KVM43016	-

VGA Hub KVM	Local	Extended	IP	8-Port	16-Port	32-Port
	1	0	0	RWX119 - HKVM10008	RWX119 - HKVM10016	-
	1	1	0	RWX119 - HKVM11008	RWX119 - HKVM11016	-
	1	0	1	RWX119 - HKVM10108	RWX119 - HKVM10116	-

DB-15 VGA KVM Cables: RCB-6 (6 ft.) / RCB-10 (10 ft.) / RCB-15 (15 ft.)

DVI KVM	Local	Extended	IP	12-Port	-
	1	0	0	RWX119 - DVIKVM112	-

DVI-D KVM Cables: RCI-6 (6ft.) / RCI-15 (15 ft.)

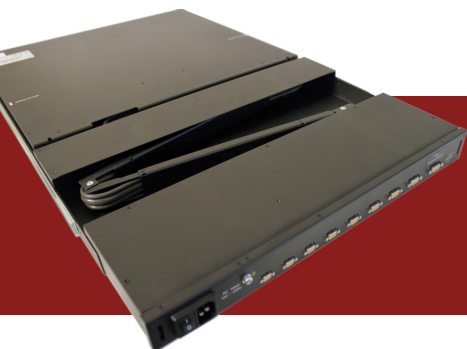

Dependable, integrated KVM switches for quick, efficient at-the-rack access of your critical servers.

Model	RWX119	RWX119 with Integrated KVM
Product Dimensions (HxWxD)	1.73 x 17.4 x 18.1 in (44 x 442 x 460 mm)	1.73 x 17.4 x 22.8 in (44 x 442 x 579.1 mm)
Package Dimensions (HxWxD)	5.5 x 23.2 x 30.2 in (140 x 590 x 768 mm)	5.5 x 23.4 x 30.2 in (140 x 595 x 768 mm)
Net Weight	25.3 lb (11.5 kg)	28 lb (12.5 kg)
Mounting Depth	18 .1 in. (min) to 29.5 in. (max) (460 to 749.3 mm)	23.5 in. (min) to 34.5 in. (max) (596.9 to 876.3 mm)
KVM Cable (included) CATx Dongles sold separately	1 x 6 ft Combo Cable (VGA, USB)	8-Port: 8 x KVM Cable; 16 & 32-Port: 16x KVM Cable * All dongles for CATx KVMs sold separately
LCD Panel / Video & Audio		
Display Size	19-inch Widescreen TFT color LCD	
Max Resolution (dots x lines)	1440 x 900	
Backlight Type	LED	
Brightness (nits)	300	
Contrast Ratio (typ.)	1000:1	
Color	16.7 M	
Viewing Angle (H/V)	160° x 160°	
Standard Video Input	VGA	
Optional Video Input	HDMI, DVI, Composite (BNC), S-Video	HDMI, DVI, DisplayPort, VGA
Plug & Play	VESA EDID 1.3	
Audio	Optional Built-in Dual Stereo Speakers 2W x 2	
Power		
Supply Range	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Keyboard		
Keyboard / Mouse	104-key Notepad Keyboard / Glidepoint Touchpad	
Keyboard Layout	Windows (standard), MAC , SUN	
Keyboard Languages	United States (standard), United Kingdom, Germany, France, Spain, Norway, Italy, Russia, Switzerland, Netherlands, Portugal, China, Japan, Korea, Arabia, Turkey	
Environmental Specifications		
MTBF (hrs)	50,000	
Operation Temperature	32 to 131°F (0 to 55°C)	
Storage Temperature	-4 to 140°F (-20 to 60°C)	
Operating Humidity	20~90%, non-condensing	



Access | Integrate | Consolidate