

Secure 4-port, Single-head DisplayPort KVM switch with dedicated CAC port, 4K Ultra-HD support and Preview Screen

KEY FEATURES

- Supports Windows, Mac and Linux OS
- Single-head DisplayPort video interface
- 4K Ultra-HD resolution - supports up to 3840 x 2160 @ 30Hz
- Advanced configurable CAC port
- External power supply - Level VI efficiency
- Computer interface isolation while powered or unpowered
- Ensures all user data is completely isolated and no data is ever stored
- No external interfaces can be used, only keyboard, mouse and CAC devices accepted
- Secure channel switching with leak prevention, no hotkeys
- Front panel tactile buttons for secure channel switching and LED channel indicators
- Peripheral and authentication ports isolation for secure usage
- Tamper evident label and anti-tampering technology
- No wireless devices connected
- Ensures only trusted admin gains access

APPLICATIONS

- Government Operations
- Defense Applications
- Secure Control Rooms
- Corporate Communications
- Server Operations
- Educational Administrations
- Medical Facilities
- Banking Network
- Insurance Data Centers
- Transit Management
- Industrial Operation
- Intelligence Communications



DESIGNED
AND MADE
IN THE USA



KEYBOARD AND MOUSE EMULATION

The Secure KVM emulates (simulates) the presence of a keyboard and mouse for every attached computer through a USB cable. Both selected and non-selected computers maintain a constant connection with the unit's keyboard mouse emulation controllers, allowing for ultra-fast switching and restricting discovery of newly connected peripherals during switching operations. Emulation of keyboard and mouse also prevents direct connection between the peripherals and the connected computers, shielding systems from potential vulnerabilities.

CAC SUPPORT

Many secure KVM switches support CAC devices, such as smart-card and biometric readers, bolstering security when using the device. However, IPGard takes CAC security even further, allowing users to assign specific peripheral devices to the KVM's CAC port. Once a peripheral device has been registered by an authenticated admin, users can then switch the connection between that device and the PC's along with KVM switching.

SECURE VIDEO/AUX EMULATION


The KVM can simulate a generic EDID, allowing it to operate most of the connected DP monitors in the market. Both selected and non-selected computers maintain a constant connection with the unit's video and EDID emulation controllers, allowing for ultra-fast switching and restricting discovery of newly connected monitors during switching operations. The unit prevents unwanted and unsecure data from getting transmitted between the computers and the display.

VIDEO	
Format	DisplayPort1.2a
Input Interface	(4) DisplayPort
Output Interface	(2) DisplayPort
Resolution	Up to 4K (3840x2160 @ 30Hz)
DDC	5 volts p-p (TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.
USB	
Input Interface	(8) USB Type B
Output Interface	(2) USB 1.1 Type A for KM Devices
Emulation	USB 1.1 and USB 2.0 Compatible
CAC	Configurable USB 2.0 Port
AUDIO	
Audio Input	(4) 3.5mm stereo audio
Audio Output	(1) 3.5mm stereo audio
CONTROL	
Front Panel	Front panel SELECT buttons
OTHER	
Power	External 100-240 VAC/ 12VDC2A @ 24W
Dimensions	17"W x 10"H x 2"D
Weight	4.2 lbs
Approvals	NIAP PP 4.0, UL, CE, ROHS Compliant
Operating Temp.	+32 to +104°F (0 to +40°C)
Storage Temp.	-4 to 140°F (-20 to +60°C)
Humidity	Up to 80% (no condensation)

ORDERING INFORMATION

Part No.	UPC	Description
SA-DMN-DP-P	686911124211	4-Port SH Secure Pro DP KVM w/audio, CAC and Preview Screen, PP 4.0. Includes: [SA-DMN-DP-P; PS12V2A]

INSTALLATION DIAGRAM

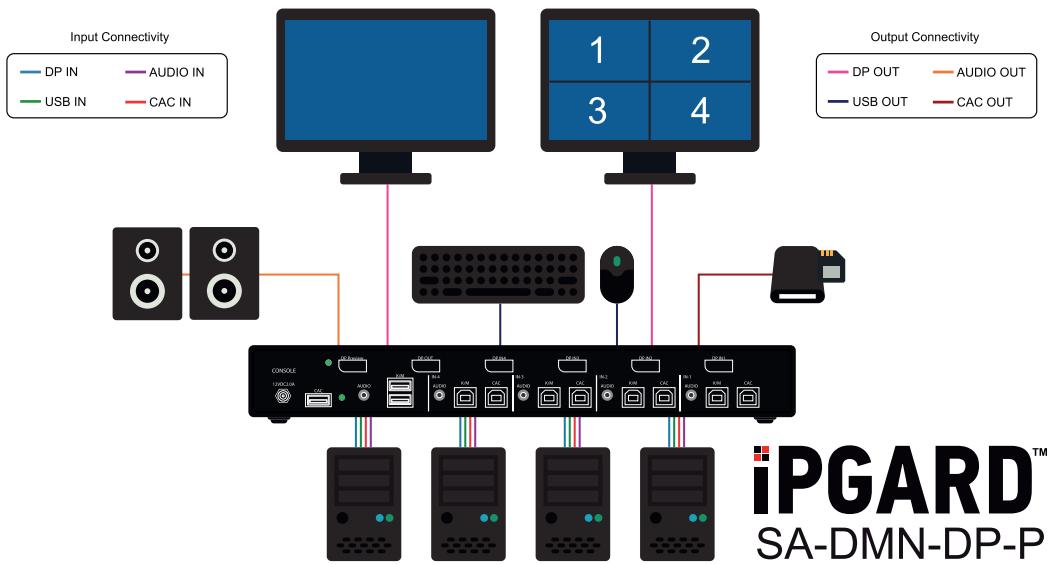

IPGARD™
SA-DMN-DP-P

CALL US TOLL FREE:
(888) 99-IPGARD | (702) 800-0005
INFO@IPGARD.COM | WWW.IPGARD.COM