


VPI P/N: FIBER-RA-D-LCLC-62-xM
 X= 1,2,3,5,10 or 15

Fiber Jumper Duplex LC-LC Right Angle

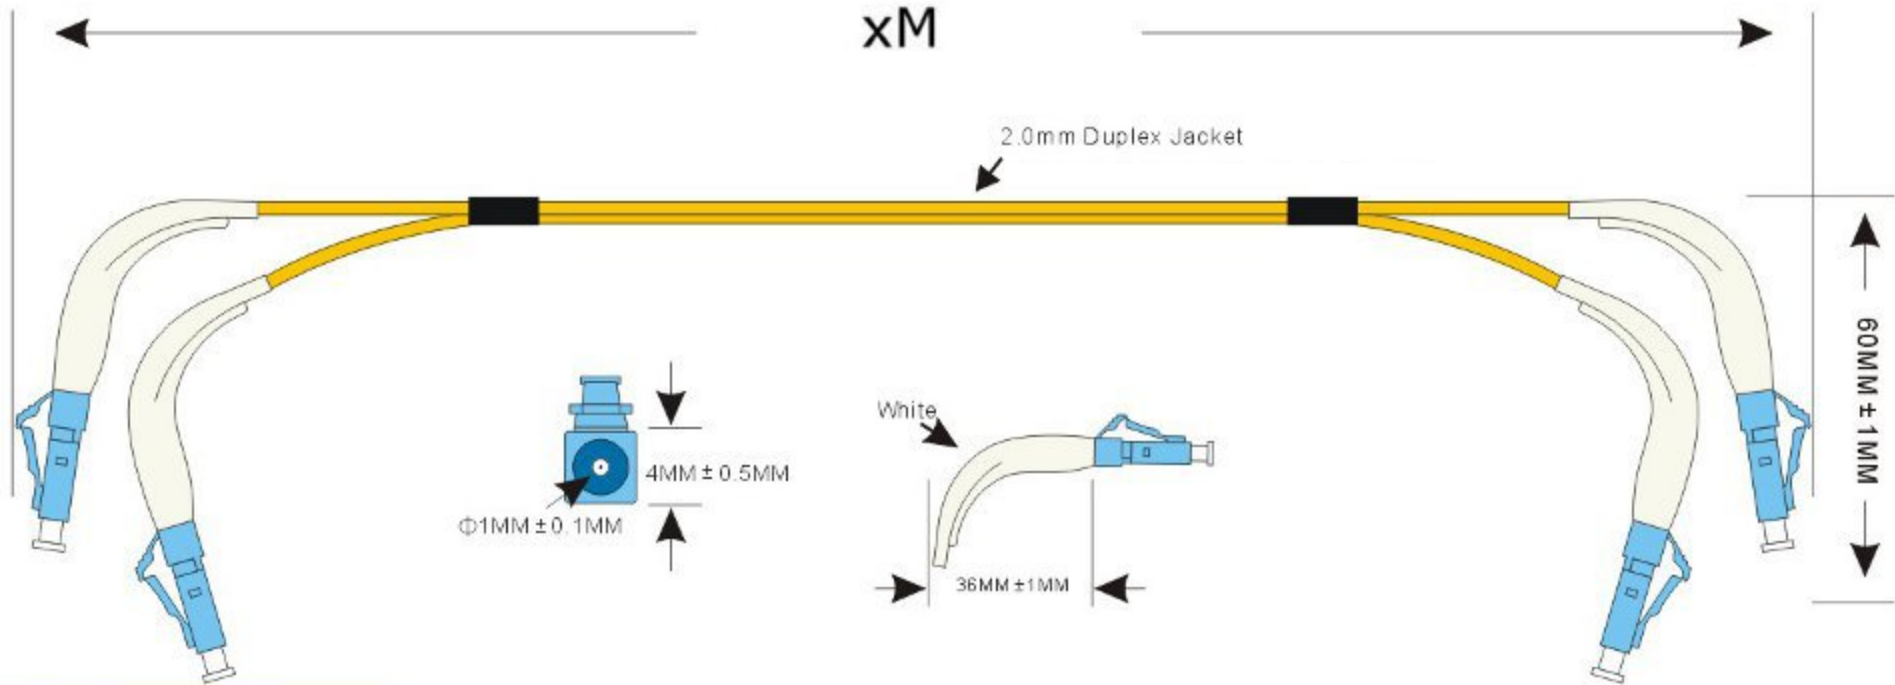

Parameter	Value
Operating Temperature:	-20°C ~ 60°C
Storage Temperature:	-40°C ~ 60°C

Parameter	Value				
	Single mode				Multimode
	SPC	UPC	EUPC	APC	PC
Insertion Loss for Single Fiber Connector	$\leq 0.30dB$	$\leq 0.30dB$	$\leq 0.30dB$	$\leq 0.30dB$	$\leq 0.30dB$
Insertion Loss for Dual Fiber Connector	$\leq 0.50dB$	$\leq 0.50dB$	NA	$\leq 0.50dB$	$\leq 0.50dB$
Return Loss	$\leq -45dB$	$\leq -55dB$	-60dB	$\leq -65dB$	NA

Fiber buffer = 2mm OFNR
 Connectors = LC Duplex right angle



**VIDEO
 PRODUCTS
 INCORPORATED**

1275 Danner Drive Aurora, Ohio 44202
 Tel: 330-562-2622 Fax: 330-562-1999
 www.vpi.us